


Repair Parts Sheet	Revision	Revision Date	Product Code Beginning
L4760	A	05/2023	For jacks built on or after May 1, 2012.

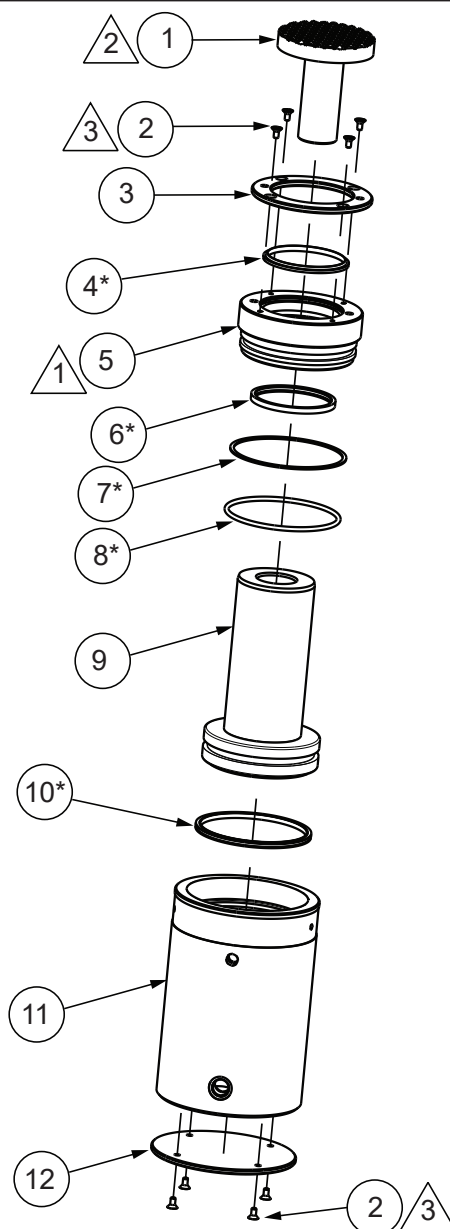

**Note: See Page 2
for parts list.**

Notes

Item	Torque / notes
1	Apply anti-seize (part 42921) to threads between retaining nut and housing.
2	Apply anti-seize (part 42921) to surface between load cap stem and plunger.
3	Torque to 60-70 in-lbs.

Repair Parts List, Figure 1

L4760


Item	Description	Qty.	Part Number
1	Load Cap	1	42208E
2	FHCS 1/4-20 X .50	8	44076
3	Spacer Retaining Nut	1	46446
4	Wiper Ring*	1	CF89044
5	Retaining Nut	1	46164E
6	T-Seal Rod*	1	40762
7	Back Up*	1	5608358
8	O-Ring*	1	5602358
9	Piston	1	46532E
10	Piston Seal *	1	42569
11	Housing	1	46531E
12	Base Plate	1	46535E

Notes: Items with * are included as part of Kit WJ60K.



**To maintain your warranty,
have your products inspected and repaired
by an authorised Enerpac Service Centre**

www.enerpac.com

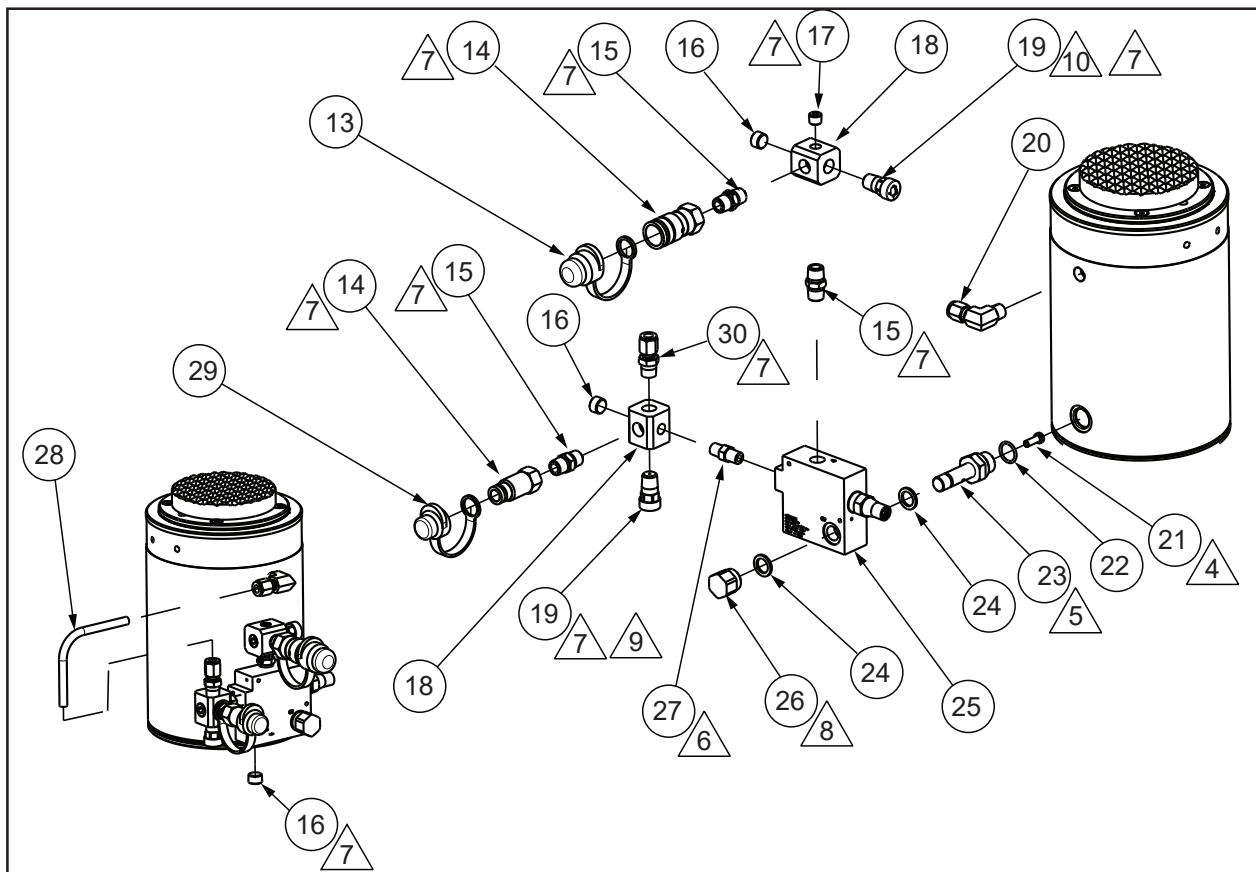

Notes

Item	Torque / notes
4	Stake end of adapter to retain the screen.
5	Torque to 180-200 FT-LBS.
6	Torque to 30-40 FT-LBS.
7	Torque to 50-60 FT-LBS.
8	Torque to 90-100 FT-LBS
9	Set relief valve 4,200-4,500 PSI.
10	Set relief valve 5,000-5,200 PSI.

**Note: See Page 4
for parts list.**

Repair Parts List, Figure 2

L4760

Item	Description	Qty.	Part Number
13	Dust cap ram	1	C516E
14	High pressure FF coupler	1	46321
15	Hex Nipple 3/8	3	46379R
16	Pipe Plug	3	84084E
17	Pipe Plug	3	82552E
18	Multi port conector	2	46166E
19	Relief valve assembly	2	CJ160900W
20	Male elbow	1	40085E
21	Inline screen	1	DS1931118
22	O-Ring*	1	B1910503
23	O.C. Valve Adapter	1	46165E
24	Gasket-Plug*	2	68183
25	Mod. O. C. Valve	1	46175SR
26	Acorn nut	1	46740E
27	Nipple	1	4100067E
28	Connector Tubing	1	46540E
29	Dust cap hose	1	C515E
30	Male connector	1	89699E

NOTES: Item with * are included as part of Kit WJ60K.